
Videoscope

HD INSPECTION CAMERA

VSP-600



- **PE covered tube with ABS handle**
- **Flexible Tube**
- **USB Cable Connection**
- **Snapshot Button**
- **Built-in adjustable white LED lights at the water-resistant camera**
- **IOS, Windows, Android**
- **View and save the images and video on your Launch's diagnostic tool with USB ports**

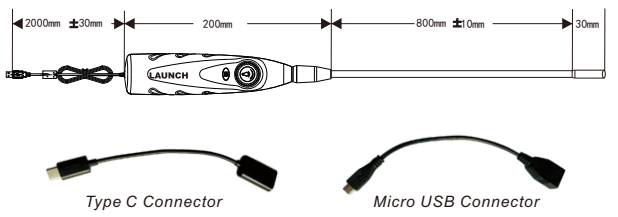

Type C Connector

Micro USB Connector

Using your Inspection Camera

Handle:This is where you grip the Inspection Camera to guide the neck into small places

LED Brightness control: Your camera has LED lights in the len that act like a torch to illuminate dark spots where the camera can't see well. This dial allows you to adjust the lights' brightness as environment.

Snapshot button: This button takes a snapshot (picture)of the current view and saves it to you computer as an image .This is useful if you need a record of what the inspection camera was seeing for later review.

Flexible Tube: This is what makes the inspection camera so useful. You can bend the neck to get in to hard-to-reach places and even if it is not straight, it can still give you pictures of what the camera is looking at. **(While the neck can bend into some strange shapes, please do not force it too hard. Everything has its limits!)**

Camera : The camera is water-resistant and is where you can attach the useful optional accessories (magnet, mirror, hook) add-on.

Color Box: Your inspection camera comes with a useful box where you can store and protect it when not in use or during travel.

NOTE:

* I Carefully read the user manual before using, and keep it well for future reference.
* I Carefully check the device parts list before using.For any doubt, contact Launch distributor immediately.
* I Due to the product upgrade, tiny difference between the user manual and the device will not be further noticed. Take the device as standard.

Copyright reserved!

- Without written agreement from Launch Tech Co., Ltd (Hereinafter refer to "Launch"), any company or person is not allowed to copy and duplicate this user manual in any format (electronic, mechanical, video, record or other formats).The user manual is designed only for Launch products.
- Any consequence caused by using the user manual to guide other device operation is not under the responsibility of Launch.
- Launch and its branches are not responsible for the fees and expense of the device damage and loss due to private accident or from third party, misuse and abuse of the device, unauthorized change and repair, or any operation and maintenance not following Launch standard. Launch is not responsible for device damage or problem due to the usage of any optional parts or consumables instead of Launch original products or Launch recognized products.
- Declaration: Other product names mentioned in the user manual are aimed to describe the device usage. The registered trademarks still belong to the original company.
- The device is for professional technicians or maintenance and repair personnel.

Registered Trademark


Launch has registered its trademark in China and several other countries, logo is LAUNCH and its subsidiaries.In those countries where Launch trademark, service mark, dot name, icon, company name not registered yet, Launch declaim the right for its unregistered trademark, service mark, dot name, icon, and company name.Trademarks of the other products and company names mentioned in the user manual still belong to original registered company. Without written agreement from the owner, no person is allowed to use the trademark, service mark, dot name, icon and company name of Launch or of other mentioned companies.You can visit http://www.cnlaunch.com or write to Customer Service Center of LAUNCH TECH CO., LTD at Launch Industrial Park, North of Wuhe Avenue, Banxuegang, Longgang District, Shenzhen, P.R.China, to get contact with Launch for the written agreement on the usage of the User Manual.

Specification

Len O.D.(mm)	5.5mm
Sensor Size	2.8mm
Resolution	1280*720
Frame Rate	30fps
View Angle	60°
Focus Distance	10-50mm
White Comparision	Automatic
Exposure Light	Automatic
Dimmable LED	6pcs
Operating Temperature	0°C to 65°C
Tube O.D.(mm)	4.8mm
Tube Length	800mm
Bending Radius	50mm
USB Cable Length	2000mm
USB Port	USB2.0/Type C/Micro USB
Power Supply	5V via USB
Photo Format	JPEG
Video Format	AVI
Application Software	LAUNCH Videoscope APP
Support platform	Windows/Android
Mirror/optional	YES

Color Box Contents

- **USB endoscope with flexible tube and USB cable**
- **Optional accessory: Hook, Magnet & Mirror**
- **Type C Connector&Micro USB Connector**
- **Manual**

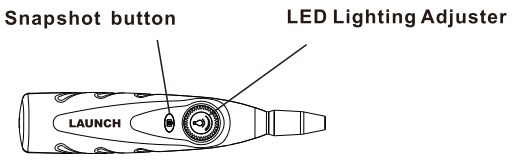



Mirror **Magnet** **Hook**

WEEE Directive & Product Disposal

At the end of its service life, this product shouldn't be treated household or general waste. It should be handed over to the applicable collection point for the recycling of electrical and electronic equipment, or returned to the supplier for disposal.

RoHS COMPLIANT